


VCL-LD™ - Voice Compression

BETWEEN TWO SWITCHES

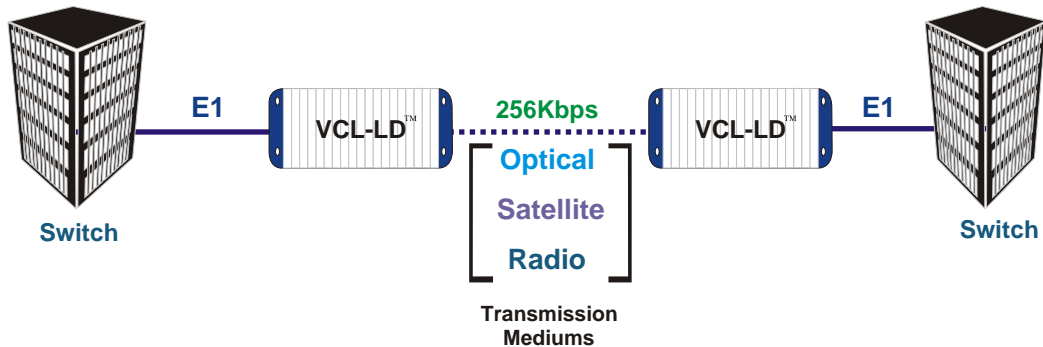

Signaling Supported

E1, R2 DTMF - Q.441
E1, R2 Digital - Q.422, Q.421
PRI ISDN
SS7 Signaling
C7 Signaling