



# ORION TELECOM NETWORKS INC.

## 16 x E1 120 Ohms (RJ45) to 75 Ohms (M4 Female Connector) Converter

---

Data Sheet & Product Brochure

**Headquarters: Phoenix, Arizona**

**Orion Telecom Networks Inc.**

16810, Avenue of the Fountains,  
Suite # 108, Fountain Hills, AZ 85268 U.S.A.  
Phone: +1 480-816-8672,  
**Fax:** +1 480-816-0115  
**E-mail:** [sales@oriontelecom.com](mailto:sales@oriontelecom.com)  
**Website:** <http://www.oriontelecom.com>

**Regional Office: Miami, Florida**

**Orion Telecom Networks Inc.**

4000 Ponce de Leon Blvd. Suite 470,  
Coral Gables, FL 33146 U.S.A.  
Phone: 1-305-777-0419,  
**Fax:** 1-305-777-0201  
**E-mail:** [sales@oriontelecom.com](mailto:sales@oriontelecom.com)  
**Website:** <http://www.oriontelecom.com>

**E1, 120 Ohms (RJ45) to E1, 75 Ohms (M4 Female Connector) Converter  
19-Inch Rack Mount Version:**

**E1, 120 Ohms (RJ45) to E1, 75 Ohms (M4 Female Connector) Converter**

**What does it do?**


The E1, 120 Ohms (RJ45) to E1, 75 Ohms (M4 Female Connector) Converter, may be used to convert up to 16, E1, 120 Ohms (RJ45) Interfaces to E1, 75 Ohms (M4 Female Connector) Interfaces.

**Application Where is it used?**

The E1, 120 Ohms (RJ45) to E1, 75 Ohms (M4 Female Connector) Converter, may be used in applications where the user requires to convert up to 16 (or fewer), E1, 120 Ohms (RJ45) Interfaces to 16 (or fewer) E1, 75 Ohms (M4 Female Connector) Interfaces.

**Connecting / Converting an E1, 120 Ohms (RJ45) Interface to an E1, 75 Ohms (M4 Female Connector) Interface.**

**120 Ohms/75 Ohms Converter  
19 inch Rack Mount Version**

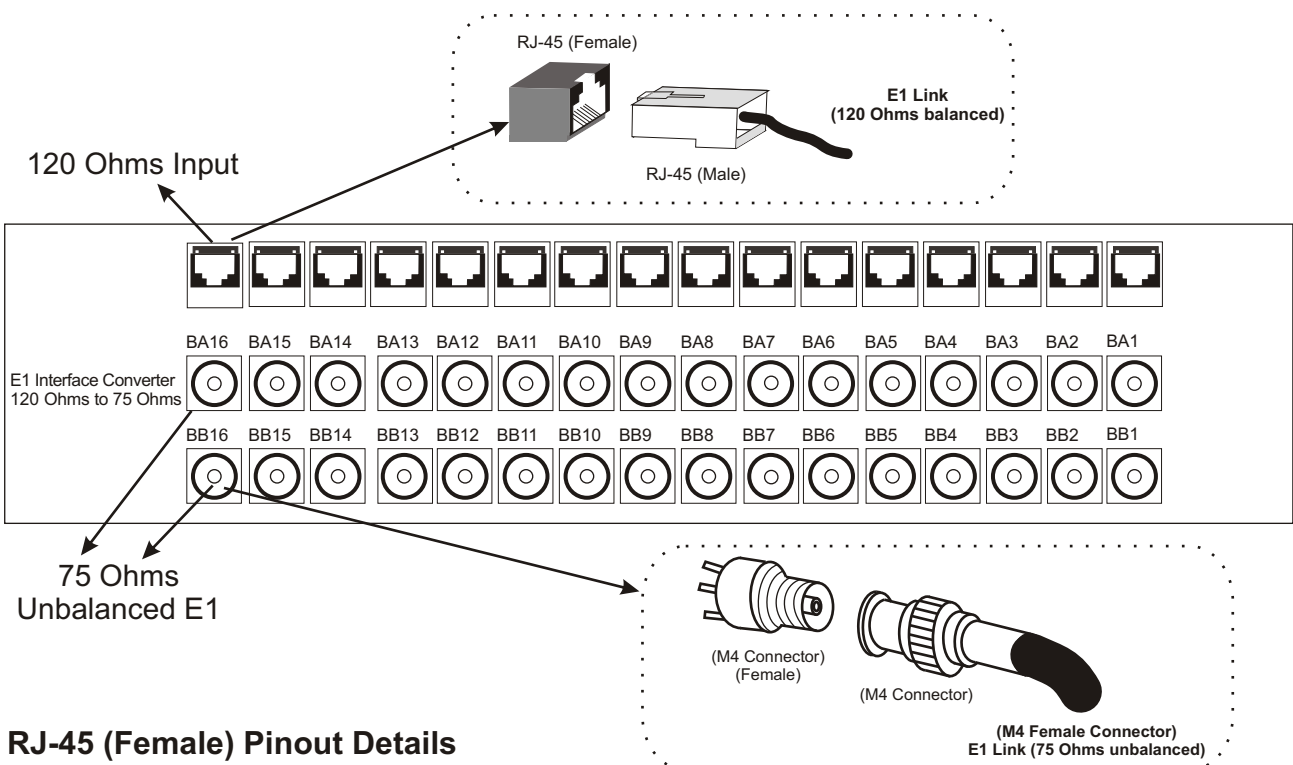


**RJ-45 (Female) Pinout Details**

RJ-45 (Female) Pin #	M4 Female Connector
1	BA
2	BA
4	BB
5	BB



**Connector Details**

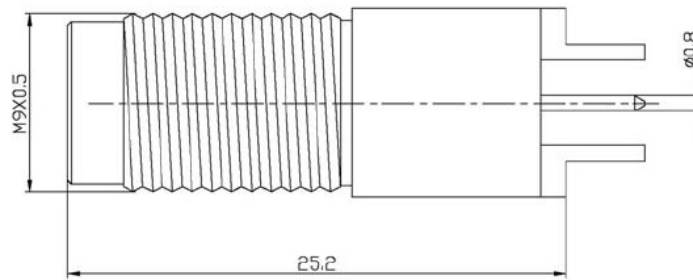

**Mechanical Drawing - M4 Female Connector**

**Material and Plating:**

Body	Brass, Nickel plated
Center contacts	Brass, Gold plated
Insulators	PTFE

**Electrical Characteristics:**

Characteristic impedance		75 Ohms
Rated Voltage		500 V
Frequency range		Max 1.5 GHz
Insulation resistance 25-75%RH		10 Gohm
Insulation resistance 90-95%RH		100 Mohm
Contact resistance initial value	Centre contact	2 mohm
	Outer contact	1 mohm
	Braid to body	1 mohm
Rated current		5A
Insertion loss f<500 MHz		Max 0.1 dB
Voltage proof, contact-contact housing		1.5 kV

**Environment**

Temperature range 5-100% RH	-40°C to +120°C
-----------------------------	-----------------

### Mechanical Specification

Rack Mounting	Standard 19 Inch. DIN Rack
Height	90 mm.
Width	45 mm.
Length	485 mm. (with mounting brackets)
Weight	1.4 kg.

### Ordering Information

16 x E1 120 Ohms to 75 Ohms (M4 Female Connector) Converter		
Part #	Product Description	Qty
VCL-1477-CONV-120-RJ45F-75-M4F-16	16 x E1 120 Ohms to 75 Ohms Converter (RJ45 to M4 Female Connector)	1

Technical specifications are subject to changes without notice.  
Revision 3 - January 03, 2011

#### Headquarters: Phoenix, Arizona

#### Orion Telecom Networks Inc.

16810, Avenue of the Fountains,  
Suite # 108, Fountain Hills, AZ 85268 U.S.A.  
Phone: +1 480-816-8672,  
**Fax:** +1 480-816-0115  
**E-mail:** sales@oriontelecom.com  
**Website:** http://www.oriontelecom.com

#### Regional Office: Miami, Florida

#### Orion Telecom Networks Inc.

4000 Ponce de Leon Blvd. Suite 470,  
Coral Gables, FL 33146 U.S.A.  
Phone: 1-305-777-0419,  
**Fax:** 1-305-777-0201  
**E-mail:** sales@oriontelecom.com  
**Website:** http://www.oriontelecom.com