



ORION TELECOM NETWORKS INC.

VCL-STM-1 Monitoring Groomer

Product Brochure & Data Sheet

ORION TELECOM NETWORKS INC.

16810, Avenue of Fountains, Suite # 108,
Fountain Hills, AZ 85268, USA

Phone: +1 (480) 816 8672

Fax: +1 (480) 816 0115

E-mail: sales@oriontelecom.com

Website: <http://www.oriontelecom.com>

Product Overview

The VCL-STM-1 Monitoring Groomer is a cost-effective monitoring and grooming equipment which may be used to “non-intrusively” monitor “bi-directional” STM-1 links through a 80:20 optical splitter patch panel and allow the user to select 64Kbps time-slots and groom them to E1 output ports, which may be then connected to E1 probes, E1 signaling analyzers and billing servers etc.

VCL-STM-1 Monitoring Groomer




Front View

The equipment provides as many as 32 E1 output ports to which the selected / groomed 64Kbps time-slots may be output.

The figure shown below, illustrates a typical “non-intrusive”, bi-directional monitoring application of an STM-1 link in both east and west directions and the groomed time-slots are output to E1 interfaces.

Application Diagram STM-1 link monitoring

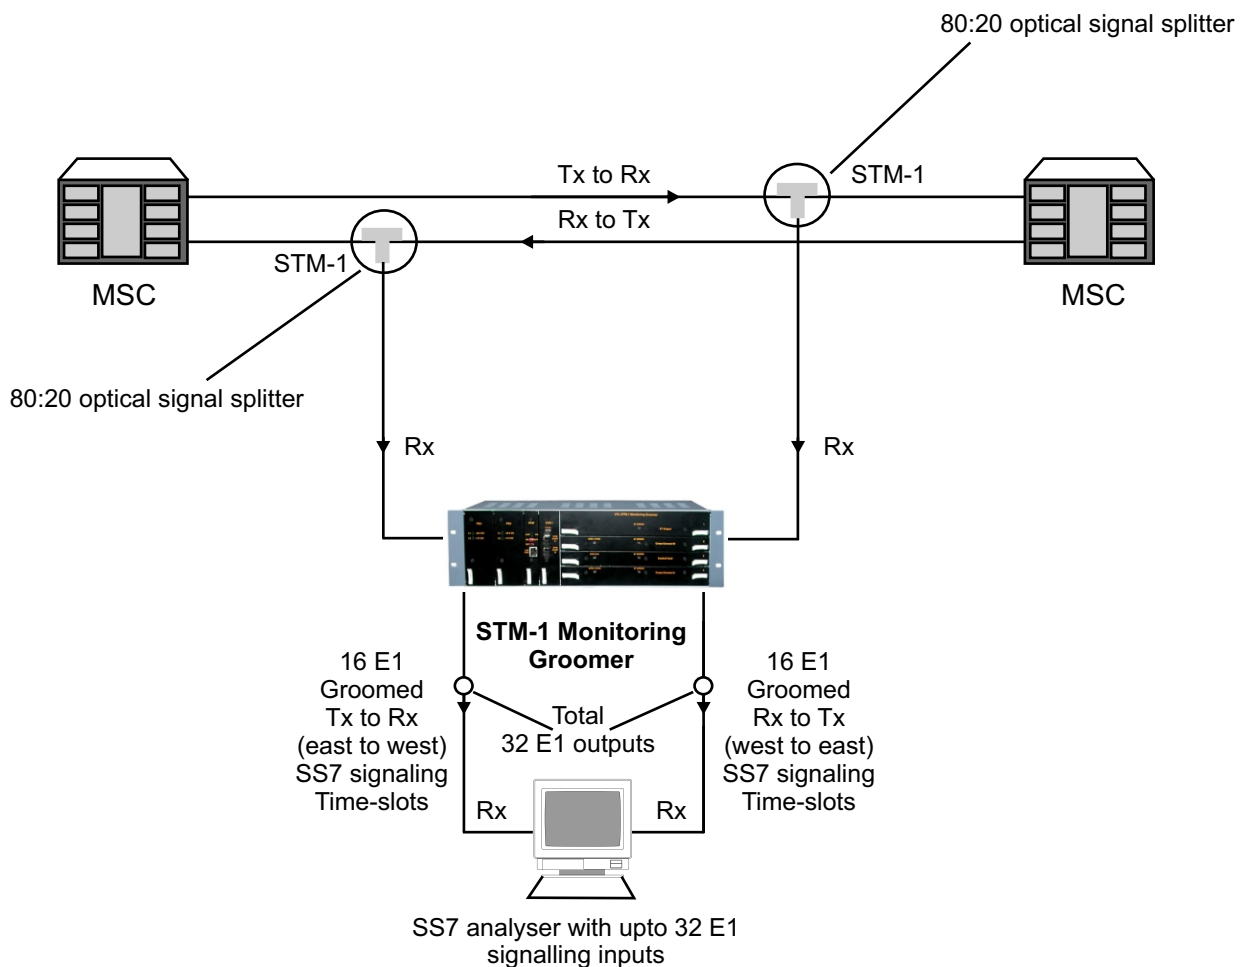

Note:

The optical signal is “tapped” through an optical patch panel using a 80:20 optical signal splitter.

Features

- Single box solution - capable of “monitoring” a bi-directional STM-1 optical link and “grooming” the selected 64 Kbps, DS-O time-slots to output E1 Ports
- Compact size
- Integrated optical amplifier
- Modular
- Easy to configure and manage
- Remote access
- Dual Power Supply Input / Dual Power Supplies
- -48 V DC operation

Technical Specifications

STM-1 Input Interfaces	
Maximum number of STM-1o Inputs	2 (for bi-directional monitoring)
Type of STM-1 signal input	1310nm or 1550 nm (ITU-T G.957 compliant)
Minimum STM-1 Input signal	-38.5dB
STM-1 Interface(s)	SFP - LC connector
E1 Output Interfaces	
E1 interface outputs	32
Conformity	G.703
Framing	G.704
Bit rate	2048kbps \pm 50ppm
Code	HDB3
Nominal Impedance	120 ohms balanced
Peak Voltage of a mark For 120 ohms balanced interface	3.0 V \pm 0.3 V
Peak Voltage of a space For 120 ohms balanced interface	0 V \pm 0.3 V
Nominal Pulse Width	244ns
Pulse Mask	As per CCITT rec. G.703

Technical Specifications

Power Supply:
Power Input: -48V DC nominal, -36V to 60V DC range
Power consumption: less than 60 Watts
Maximum current consumption: 1.25 Amps @ - 48 V DC
Timing & Synchronization:
Loop Timed (clock derived from STM-1 input signal) on Port A or Port B
Internal Clock
External Clock (120 Ohms Impedance)
Timing & Synchronization of System (as per ITU-T G. 813)
Internal and External Timing interfaces: Two E1 BITS interfaces (as per ITU-T G.703)
Internal oscillator capable of supplying a ITU-T G.813 compliant Stratum-3 SEC Support of SSM byte
Management:
RS232 Serial (COM) Interface
10/100 Base-T/RJ-45 management interface
Alarm Indicators and External Alarm Outputs
Physical Dimensions:
Dimensions (H X W X D): 133 mm x 477 mm x 260 mm
Weight: 8.5 Kg
Environmental:
Operating Temperature: 0° to 50°C
Relative Humidity: 10% to 90%, non-condensing

Technical specifications are subject to changes without notice.
 All brand names and trademarks are the property of their respective owners.
 Revision 08 - October 20, 2008.

ORION TELECOM NETWORKS INC.

16810, Avenue of Fountains, Suite # 108,
 Fountain Hills, AZ 85268, USA

Phone: +1 (480) 816 8672

Fax: +1 (480) 816 0115

E-mail: sales@oriontelecom.com

Website: <http://www.oriontelecom.com>