


# BETWEEN TWO SWITCHES

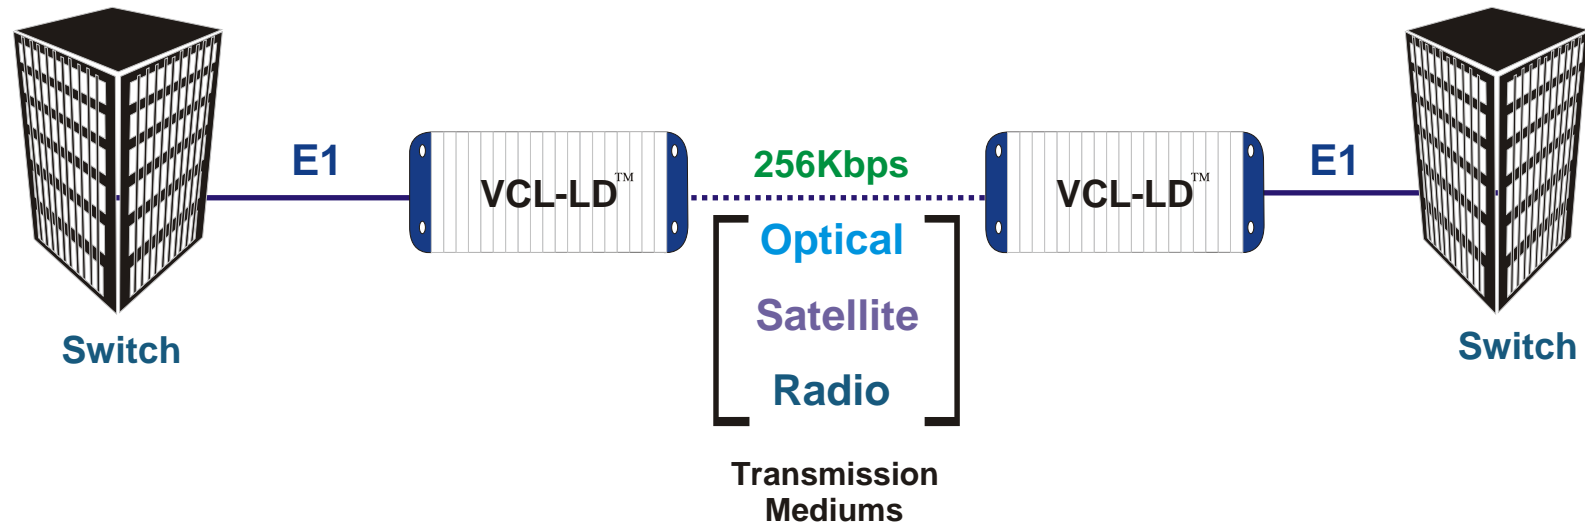

## Signaling Supported

E1, R2 DTMF - Q.441  
E1, R2 Digital - Q.422, Q.421  
PRI ISDN  
SS7 Signaling  
C7 Signaling