

VCL-2145-D, GPS / GNSS PRIMARY REFERENCE CLOCK PTP GRANDMASTER AND NTP SERVER

Introduction:

VCL-2145 (VCL-2145-D) is a high-performance, high-reliability GPS / GNSS Primary Reference Clock and IEEE-1588v2 PTP Grandmaster that provides ITU-T G.811 Primary Synchronization Frequency References which are locked to a user selected Satellite source.

The VCL-2145 (VCL-2145-D) Satellite Receiver also has an integrated, high bandwidth NTP Server engine that is capable of handling up to 5000 NTP requests per second. Multiple IRIG-B Outputs are also provided to synchronize local clock (time-of-day) display units to a central timing source with nanosecond accuracy.



Features and Highlights:

- Reliable, Cost-Efficient Reference GPS Receiver
- 50 Channel GNSS, L1 frequency, C/A Code Receiver
- ITU-T G.811 / Stratum 1 compliant (PR) Primary Reference when locked to GPS
- ITU-T G.812 compliant holdover function
- SSM Message format Compliant with ITU-T G.704. Optional GR-378-CORE for SONET Networks
- GPS locked G.703 compliant 1.544Mbps, 2.048Mbps, 2.048 MHz 1 PPS and 1 PPM outputs
- 1/5/10 MHz, 1 PPS, 1 PPM and IRIG-B outputs
- ToD compliant to NMEA 0183 (DB9 Serial Port)
- 4 x 10/100/1000BaseT NTP Ports
- Additional 1 x 10/100 BaseT NTP Port for IPv4 / IPv6 operation
- Leap Second Correction Support
- Concurrent IPv4 and IPv6 Operations
- MD5 authentication for NTP clients
- 802.1Q VLAN support for NTP Ports
- Anti-Jamming Technology: Resistant to Jamming upto CW6 level
- SSH, Telnet, Radius, SNMP V2 MIB, Password Protection
- Available with 1+0 (VCL-2145, without GPS redundancy) and 1+1 (VCL-2145-D, with GPS redundancy) options
- Power Contact and Lightning Protection as per Telcordia GR-1089-CORE.
- Standard RJ45 and BNC connectors for all inputs and outputs
- LCD display with back light.
- **GNSS Options:**
- GPS, GLONASS, GPS+GLONASS and GPS+GLONASS+SBAS

The VCL-2145 (VCL-2145-D), Primary Reference (PRC) Clock is specifically designed for frequency synchronization of 2G, 3G, HetNet and LTE mobile telecommunications networks as well as backhaul wire-line SDH / SONET and Synchronous Ethernet networks. It may be also used by Railways, Airports (and Air-Traffic Control), Power generation and distribution companies and other Utility companies who not only require highly precise G.811 frequency synchronization locked to a GPS Reference but who also need to provide an accurate time-of-day reference in their networks.

The VCL-2145-D incorporates up to dual (1+1 redundant) GPS receiver engines and dual (1+1 redundant) power supply options for added reliability which are always locked to a user selected satellite (GPS) reference to provide multiple G.811 / Stratum 1 quality frequency and time-of-day (PTP, NTP and IRIG-B) outputs. The VCL-2145 is also equipped highly accurate, low-noise OCXO / Rubidium oscillator which provides a high stability holdover clock that is typical of a Network SSU in the event of loss of GPS signal, or its antenna failure.


Additional Features:

- IEEE - 1588v2 PTP Grandmaster
- SyncE
- High bandwidth NTP Server capable of supporting up to 5000 NTP requests per second
- Redundant AC and DC power supply options

Typical Synchronization Applications:

- Synchronizing Cellular networks like UMTS, GPRS, 3G and LTE
- Power generation and distribution companies and other utility companies
- Wireless and Wireline Telecom synchronization
- Distributing Time (ToD) and Frequency reference for power utilities across all nodes of the network
- Synchronization of Defense Networks
- Synchronizing airports and aviation communications
- Synchronizing railway signaling networks and railway communications
- Synchronizing traffic management
- Broadcasting Network and Broadcast equipment synchronization.

Application Diagram

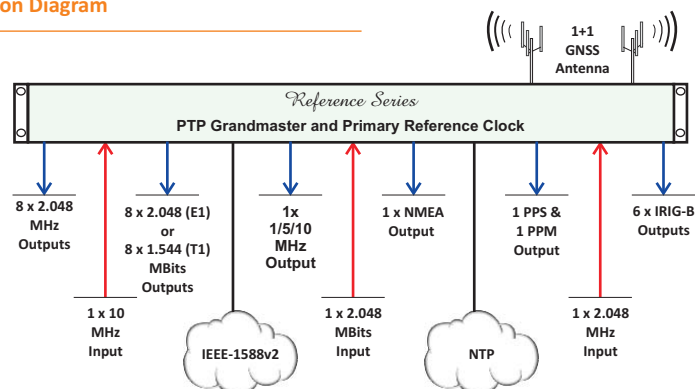

GPS Receiver as a Primary Reference (PRC) Clock with IEEE-1588v2 Grandmaster and NTP Server

Available versions:

Product	Description
VCL-2145D, GPS Primary Reference (PRC) G.811 Clock, PTP 1588v2 Grandmaster and NTP Server (Available with 1+1 and 1+0 GPS receiver option)	May be used in multi-service applications as a G.811, Primary Reference (PRC) Clock and NTP Provides 1PPS, 1PPM, NMEA, 1/5/10MHz, 2.048MHz, 2.048Mbps with SSM, 1.544Mbps outputs Frequency Outputs with High Stability OCXO and Rubidium (G.812) Holdover Clock options. OCXO and Rubidium (G.812) Holdover Clock options are available. Optional: GNSS: GPS, GLONASS, GPS+GLONASS, GPS+SBAS (ISRO-GAGAN)

Technical Specifications

GPS Receiver:

- 50 Channel GNSS Receiver
- Options of 1+0 and 1+1 GPS Receivers for redundant and non-redundant GNSS applications
- GNSS L1 frequency, C/A Code Receiver
- Synchronizing Time:
 - Acquisition time - Hot Start: 1 sec.
 - Acquisition time - Warm Start: 28 sec.
 - Acquisition time - Cold Start: 28 sec.
- GNSS Signal
 - Tracking and Navigation: -162 dBm
 - Reacquisition -160 dBm
 - Cold Start -148 dBm
- Antenna Connector: TNC
- Accuracy Of Time-Pulse Signal referenced to GPS: ± 30 ns (raw)
- Accuracy Of Time-Pulse Signal referenced to GPS: ± 15 ns (compensated)

Internal (G.812) Synchronization Options:

- Rubidium Oscillator
- OCXO (Oven-Controlled Crystal Oscillator)

NTP Server:

- NTP Protocols: NTP v2 (RFC 1119), NTP v3 (RFC 1305), NTP v4
- IP Protocols: IPV4, IPV6
- Time Protocol: (RFC 868)
- Daytime Protocol: (RFC 867)
- Synchronization of IEC 61850 compliant devices using NTP/ SNTP protocol
- Capable of processing up to 5000 requests per second.
- Multiple LAN Support

IEEE-1588 PTP Grandmaster:

- Compliant with IEEE-1588 v2 (2008) specifications
- Profiles supported: Telecom Profile, Power Profile
- Frequency Accuracy: +/- 50ppb referenced to GPS
- Time Accuracy: < 50ns

Standard Frequency and ToD* Outputs:

Output:	Number of Ports	Connector
ITU-T G.811 Compliant 2.048 Mbit/s (E1) / 1.544 Mbit/s (T1) outputs	8 (8E1 or 8T1)	RJ45
ITU-T G.811 Compliant 2.048 MHz, 75 Ohms, phase-locked to GPS	8	BNC
ITU-T G.811 Compliant 1/5/10 MHz, 50 Ohms, phase-locked to GPS	1	BNC
IEEE 1588v2 PTP Grandmaster: 10/100/1000 BaseT	1	RJ45
SyncE in as per ITU-T G.8261, G.8262 and G.8264	2	RJ45
IRIG-B	8	BNC
1 PPS, phase-locked to UTC	1	BNC
1 PPM, phase-locked to UTC	1	3 Pin Connector
TOD (Time-Of-Day) output compliant to NMEA0183	1	DB9, RS-232C
NTP v4, IPv4 and IPv6 10/100/1000 BaseT	4	RJ45

*ToD Time Of Day

Management and Monitoring Ports:

- RS-232C Connector
- USB Connector
- 10/100BaseT Ethernet
- 1 x External Alarm Relay Contact

Security and Protection:

- Password Protection
- Secured Access via SSH V2
- RADIUS

System Access, Control and Management Options:

- Telnet, SSH, RADIUS
- CLI Control Interface (HyperTerminal or VT100)
- SNMP V2 Traps (MIB File provided)

Configuration and Monitoring Software:

- CLI, English commands
- GUI (Graphical User Interface) - Windows

Power Supply Options:

- Dual Redundant
- 1+1 DC 24V power
- 1+1 DC -48V power
- 1+1 DC 110/125V DC power
- 1+1 AC power (100 to 240V AC, 50/60 Hz)

MTBF:

MTBF for VCL-2145 with RbXO Option:

- Per MIL-HDBK-217F: ≥ 17 years @ 40°C
- Per Telcordia SSR 332, Issue 1: ≥ 20 years @ 40°C

MTBF for VCL-2145 with OCXO Option:

- Per MIL-HDBK-217F: ≥ 21 years @ 40°C
- Per Telcordia SSR 332, Issue 1: ≥ 24 years @ 40°C
- AC or DC

Power Consumption:

Power Consumption with OCXO Oscillator:

- < 25W during startup,
- < 18W at steady state 23°C

Power Consumption with Rubidium Oscillator:

- < 40W during startup,
- < 32W at steady state 23°C

Environmental characteristics (Equipment):

Operational:	-10°C to +60°C (Typical: +25°C)
Cold start	-0°C to +50°C
Storage	-20°C to +70°C
Humidity	95% non-condensing
Cooling	Convention Cooled. No cooling fans are required

Clock performance - GPS / GNSS:

- Performance when locked to GPS / GNSS
- Timing accuracy: < 50ns (at constant temperature) < 90ns (at variable temperature, -5°C to +55°C)

Frequency Accuracy:

- < 1×10^{-11} (24 hour average)
- G.811 quality when locked to GPS / GNSS

Frequency holdover:

OCXO:

- Stability:
- 0.5×10^{-9} (0.5 ppb) per day,
- 50×10^{-9} (50 ppb) per year
- Frequency stability: 6×10^{-10} (-5°C to +55°C)

Rubidium:

- Long term stability: $\pm 5 \times 10^{-11}$ / month
- Frequency stability: < 1×10^{-10} (-5°C to +55°C)

Antenna Specifications:

- Antenna Type: Active
- Polarization: Right hand circular
- Frequency Band: 1575.42 MHz \pm 10 Mhz
- Amplifier Gain: 40dB \pm 4dB
- VSWR: < 2.0 Max, 1.0 Typical
- Operating temperature: -40C to +85C
- Reverse Polarity Protection
- Out of Band Rejection: ≥ -60 dB @ ± 50 Mhz_off center (1575.42 Mhz) frequency
- Lightning Protection: According to EN61000-4-5 Level 4.
- LMR400 (or equivalent) Cable Length - 30, 60, 90, 120 and 150 meters.

External Frequency Synchronization Inputs:

External Inputs	Number of Inputs	Connector
2.048 Mhz, 75 Ohms	1	BNC
10 MHz, 50 Ohms	1	BNC
2.048 Mbps	1	BNC

Headquarters: Phoenix, Arizona

Orion Telecom Networks Inc.
20100, N 51st Ave, Suite B240,
Glendale AZ 85308
Phone: +1 480-816-8672
Fax: +1 480-816-0115
E-mail: sales@oriontelecom.com

Regional Office: Miami, Florida

Orion Telecom Networks Inc.
4000 Ponce de Leon Blvd. Suite 470,
Coral Gables, FL 33146 U.S.A.
Phone: 1-305-777-0419,
Fax: 1-305-777-0201
E-mail: sales@oriontelecom.com