



ORION TELECOM NETWORKS INC.

VCL-Gigabit Optical Add-Drop Multiplexer

Product Brochure

Headquarters: Phoenix, Arizona

Orion Telecom Networks Inc.

20100, N 51st Ave, Suite B240,
Glendale AZ 85308
Phone: +1 480-816-8672
Fax: +1 480-816-0115
E-mail: sales@oriontelecom.com
Website: <http://www.oriontelecom.com>

Regional Office: Miami, Florida

Orion Telecom Networks Inc.

4000 Ponce de Leon Blvd. Suite 470,
Coral Gables, FL 33146 U.S.A.
Phone: 1-305-777-0419,
Fax: 1-305-777-0201
E-mail: sales@oriontelecom.com
Website: <http://www.oriontelecom.com>

Product Overview

Orion's VCL-Gigabit Optical Add-Drop Multiplexer is a unique Gigabit multi-service optical fiber transport solution which transmits both Gigabit Ethernet (Gigabit Wire-Speed) data along with upto 16 E1 (TDM) channels over an optical fiber link. This product provides up to 4 x Gigabit interfaces with rate-limiting option on each port (with user selectable bandwidth allocation on each Gigabit port).



VCL-Gigabit Optical Add-Drop Multiplexer

1+1 optical fiber redundancy is also available for minimizing the possibility of transmission loss due to an optical link failure.

The Gigabit (Wire-Speed) Ethernet traffic along with 16 E1's are multiplexed into 1.25 Gbps optical link to provide a compact, high performance, high throughput and cost effective broadband network access solution.

Features

- 1U height, 19-Inch standard rack-mountable chassis
- Optical line bit rate 1.25 Gbps
- 1+1 Gigabit Optical WAN ports
- 1 x Gigabit Optical and 3 x Gigabit Electrical Ethernet ports with **data rate limiting feature**
- 1 Gbps data throughput for aggregate Ethernet traffic
- E1 and Gigabit Ethernet Add-Drop Function to use the equipment in Add-Drop and Chain networking
- Wire-Speed Gigabit Ethernet traffic with 16 E1 data are transported simultaneously
- Supports jumbo frame size (upto 9720 bytes) transmission
- Supports 1+1 optical link protection and APS with less than 50ms switching time
- MSA compliant SFP (Small Form-Factor) based design for improved and easy serviceability. SFP based design provides the flexibility to the customer to change service distance and support different types of optical fiber
- MSA standard compliant SFP (INF-8074i, ITU-T G.695 and FC-PI V2.0)
- Supports Automatic Laser Shutdown (ALS) option for added safety
- Performance analysis of optical ports Optical Transmission Failure, Loss of Optical Link, Loss of Frame and Errors (E-3 / E-6)
- E1 port complies to ITU-T G.703 and G.704
- Jitter tolerance, jitter transfer characteristic and jitter generation fully comply with ITU-T G.823 and G.742 recommendations
- Performance analysis of E1 ports Loss of Signal and Code Violation
- Performance Analysis of GigE port
- Provides Engineering Order Wire (EOW)
- Remote access and management over TCP-IP Telnet and SNMP
- Supports SNMP V2 monitoring and traps

Features

- Supports Command Line Interface (CLI) based on RS232 (COM Port) and TCP-IP (Telnet)
- Remote Power Down detection (RPD) alarm. Allows the local end to detect if the remote unit is unavailable due to optical link failure or due to power down
- Remote software ungradable
- AC and DC power redundancy {-48V DC (-18V to -72V) , 100-240V AC options available}
- Complies to electrostatic discharge immunity (ESD) IEC 61000-4-2 level 2
- RoHS and EMI/EMC compliant.

Highlights

- Gigabit (Wire Speed) data transmission
- Gigabit multi-service fiber optic transport solution - Transmits both E1s and Gigabit Ethernet data over an optical fiber link / or over 1+1 redundant optical fiber links for added protection against link failures
- Compact, high performance, high throughput and cost effective broadband network access solution
- SFP based design for customer convenience, flexibility to change services distance and serviceability
- Optical distance support for 550m, 10Kms, 20Kms, 40Kms, 80Kms and 120Kms without Optical Repeaters
- Supports remote power down detect function
- Ethernet data port complies to IEEE 802.3, IEEE 802.3u, IEEE 802.ab, IEEE 802.3x recommendations
- Ethernet data port supports auto-negotiation function and can work in 10M full/half duplex, 100M full/half duplex, 1000M full duplex mode (1000M half duplex is not supported)
- Ethernet Transmission media is Category 6 UTP, RJ-45 connector (electrical) for Gigabit Ethernet channel with upto 1000Mb/s data rates
- Ethernet Transmission media is optical fiber pair, LC connector (optical), for Optical Gigabit Ethernet with up to 1000Mb/s bandwidth
- Engineering Order Wire (EOW)
- Supports Command Line Interface (CLI) for configuration and management
- Supports TELNET for remote configuration and management
- Supports SNMP V2
- GUI for easy configuration
- Network Management System for monitoring multiple units from a single, central location
- Supports multiple type of alarm notifications
- Supports E1 and optical loop back configuration, etc.
- 1U (44mm) high 19 Inch Rack Mount standard rack design
- Low power consumption (Less than 15W)
- Provides E1's with 120 Ohms (RJ-45) or E1's with 75 Ohms (BNC) connections - optional
- E1 G.703, G.703 channels support all protocols sent over it, e.g. SS7 signaling, PRI for PABX interconnection
- Support for Base Station backbone development for CDMA, GSM, 3G and other applications where E1 G.703 channels and Gigabit Ethernet data are required to send over the same fiber link.

Power Supply options

- Available with Single 100V-240V AC and / or -48V DC (18V to 72V) power supply
- Available with Dual 1+1 (redundant) power supply
 - 100V-240V AC
 - -48V DC (18V to 72V)

Configuration, Maintenance and Management options

- Serial Management Port – RS232 interface (COM Port)
- TCP/IP – 10/100BaseT for remote management over a LAN / TCP/IP network
- SNMP V2 (MIB File provided with the equipment)
- Telnet – CLI (Command Line Interface)
- Windows XP and Windows 7 compatible Graphical User Interface (GUI)
- Network Management System (to monitor multiple units from a single central location).


Alarm and Indicator Monitoring

- Power Indicator
- Current Status (integrity and activity) Indicator
- Optical Signal Loss Alarm Indicator
- Remote Device Power-Down (RPD) Indicator
- Ethernet Link Indicator
- Ethernet Speed Indicator
- E1 Signal Loss Alarm Indicator
- Frame Loss Indicator
- Optical Errors (E-3 / E-6) Indicator
- Optical Code Violation Indicator
- Code Violation History Indicator
- SNMP V2 Diagnostic and Monitoring.


Application

Application: Data Rate limiting feature


VCL-Gigabit Optical Add-Drop Multiplexer supports Rate Limiting feature. A user can divide 1000Mbps (total) bandwidth into four Gigabit Ethernet ports according to their requirement. A user can configure Gigabit Ethernet Rate Limit from 2Mbps to 1000Mbps for any of the Gigabit Ethernet ports through user configurable commands.

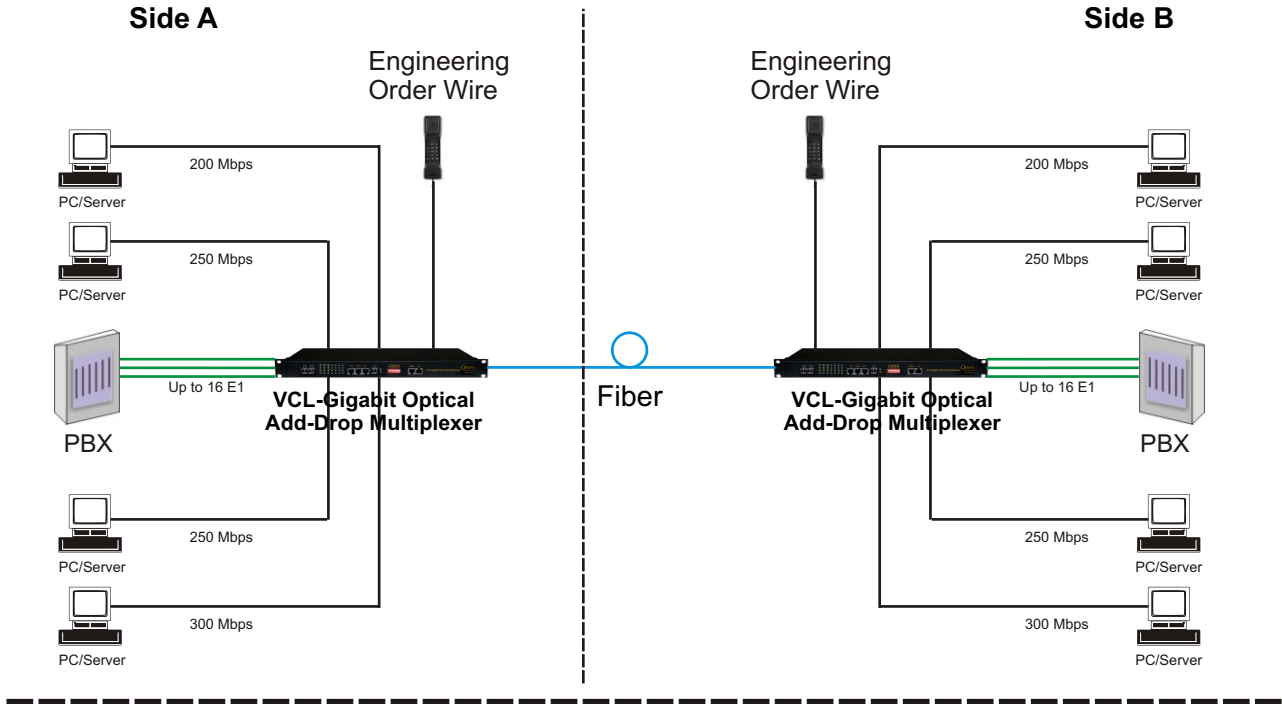


Application: Point-to-Dual Point

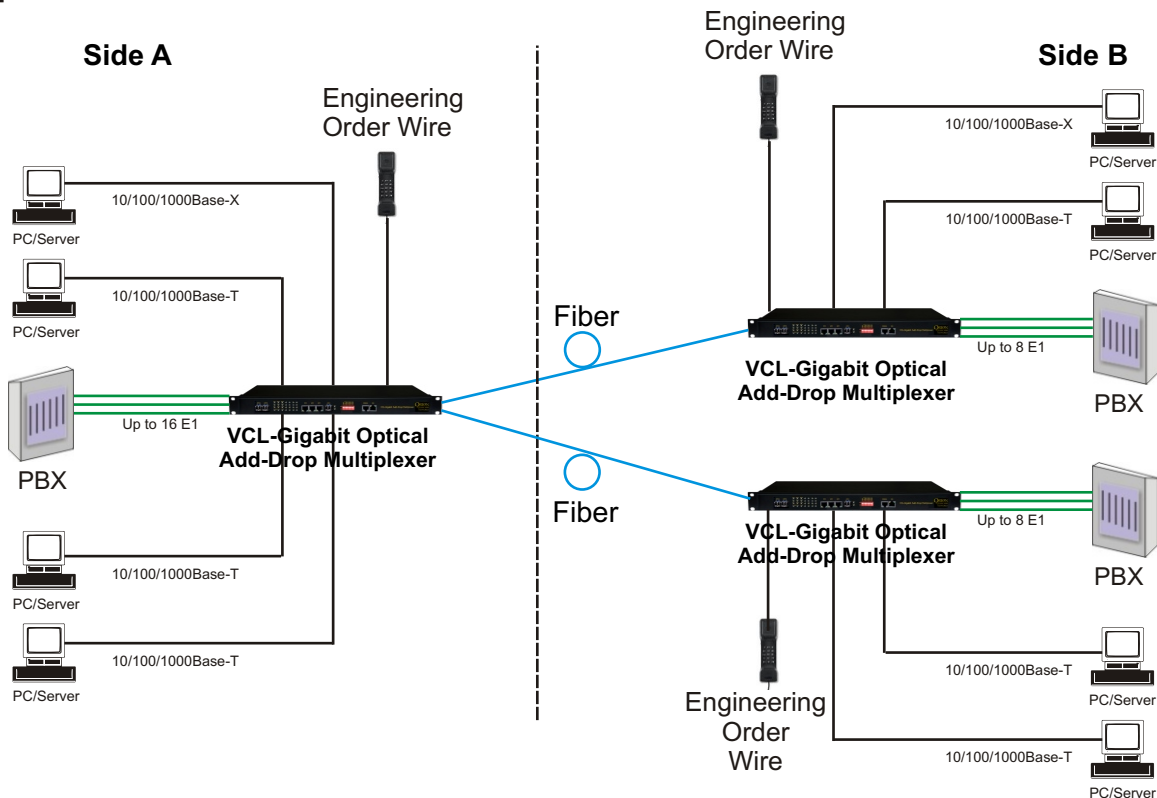

Application: Ring Network

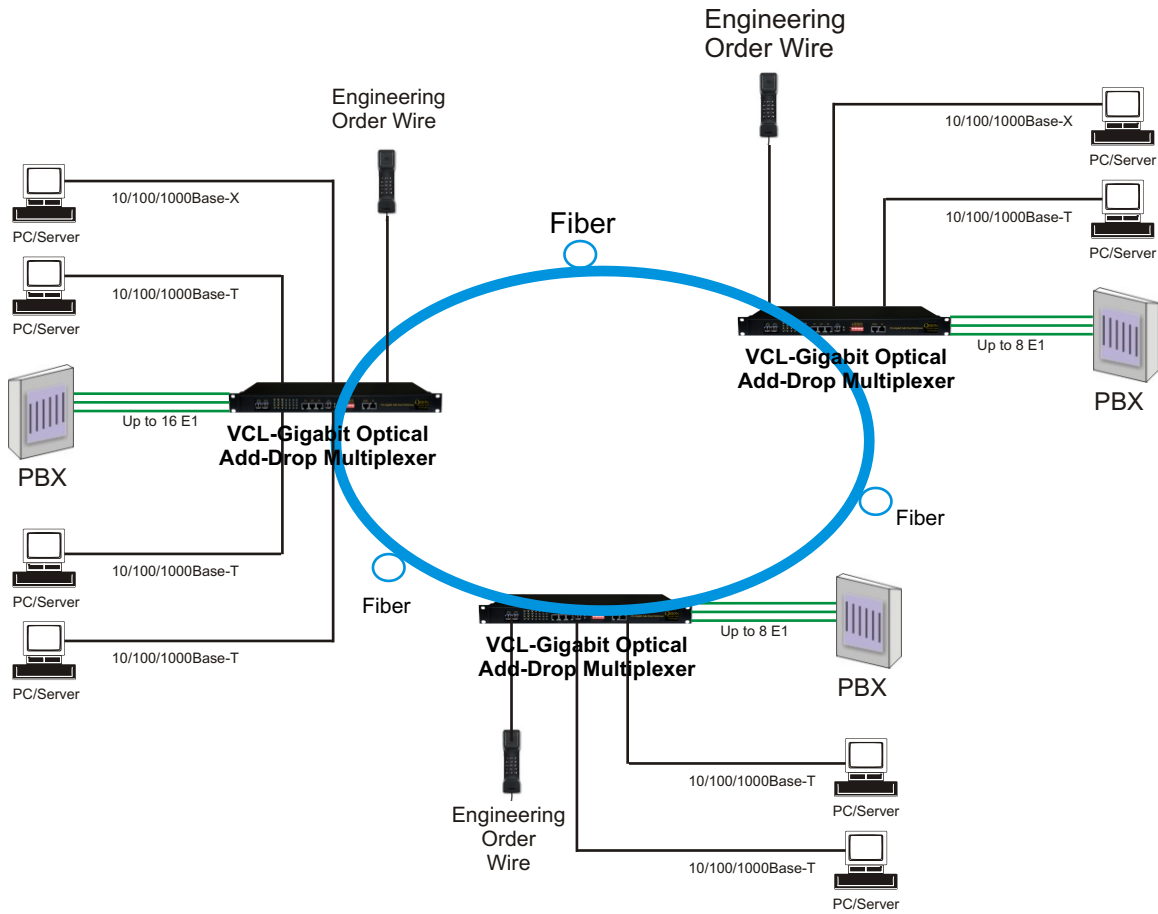

Application: Chain Network

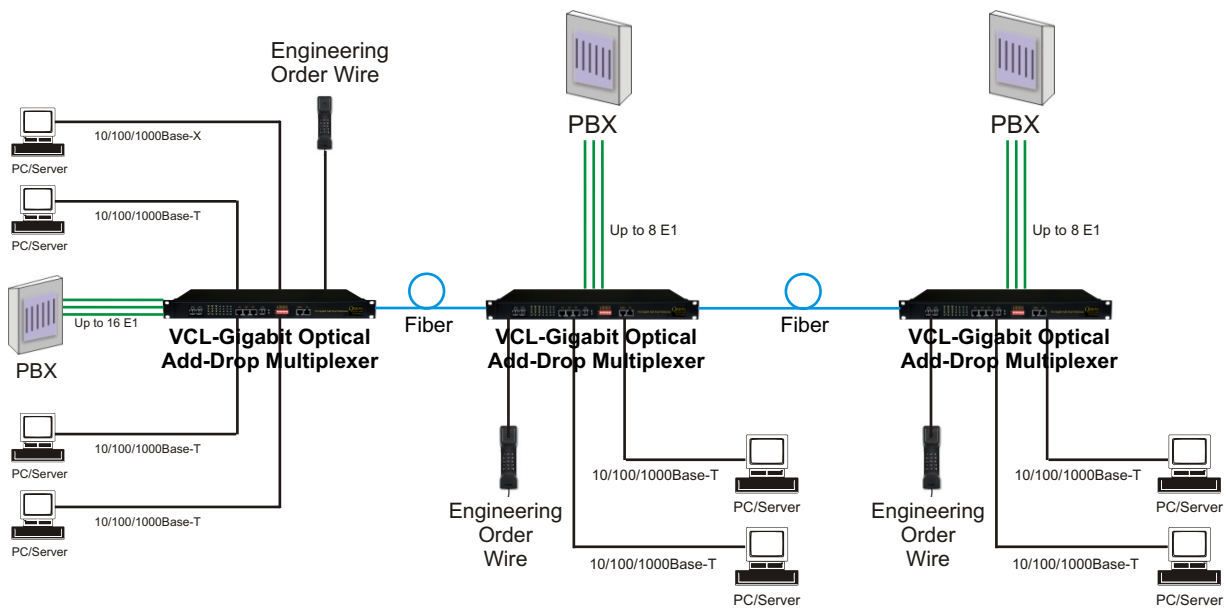

Technical Specifications

Gigabit Optical (Network Transmission Side) Interface options (SFP options)

| S. No. | Wave Length | Distance | SFP Standards |
|--------|--------------|----------|--|
| 1 | 850nm-LD | 550m | 1. Supports 1.25Gbps bit rate. 2. Connector type is LC 3. MSA (INF-8074i) Compliant and SFF-8472 v9.3 4. IEEE802.3z Gigabit Ethernet 5. DDM, RoHS & WEEE 6. International Class 1 laser safety certified (IEC 60825) 7. Complied to GR-468-CORE 8. Complied to ITU-T G.695 9. Complied to FC-PI V2.0 Standard. |
| 2 | 1310nmFP-LD | 10km | |
| 3 | 1310nmDFB-LD | 20km | |
| 4 | 1550nmDFB-LD | 40km | |
| 5 | 1550nmDFB-LD | 40km | |
| 6 | 1550nmDFB-LD | 80km | |
| 7 | 1550nmDFB-LD | 120km | |

E1 Interface Specifications

| | |
|----------------------|---|
| Electrical Interface | E1 |
| Channel capacity | 16 E1 |
| Bit rate | 2.048 Mbps \pm 50 ppm |
| Line code | HDB3 |
| Frame Structure | As per G.704 |
| Electrical Interface | As per G.703 |
| Nominal impedance | 120 Ohms balanced / 75 Ohms unbalanced (optional) |
| Jitter character | ITU-T G.742, G.823 compliant |
| Connectors | RJ-45 connectors (120 Ohms balanced) Or Male DB37 interface with BNC coaxial connectors (75 Ohms unbalanced) |

Electrical Ethernet Interface Specification: 10/100/1000BaseT

| | |
|--|---|
| Number of Interfaces | 3 |
| Interface Types | 10/100/1000BaseT |
| Ethernet Mode | Half/Full for 10 and 100BaseT, Full for 1000BaseT |
| Standard | IEEE802.3ab 1000Base-T /IEEE802.3u 100Base-TX /IEEE802.3 10Base-T |
| MDI/MDI-X Support | Yes |
| MAC address Table | 4K |
| MAC address Table aging time | 12S / 300S |
| VLAN | Port based and 802.1Q |
| Minimum Frame Size | 64 bytes |
| Maximum Frame Size | 1518/2000/9720 bytes |
| Transmission Bit Rate | 10/100/1000 Mbps |
| Connectors | RJ-45 Electrical |
| 802.1Q MAC packet transparent transmission supported | |

Optical Ethernet Interface Specification: 1000BaseX

| | |
|--|---|
| Number of Interfaces | 1 |
| Interface Types | 1000BaseX |
| Ethernet Mode | Full |
| Standard | SFP MSA (INF-8074i) SFF-8472 v9.3 IEEE802.3z 1000Base-LX/SX standard ITU-T G.695 FC-PI v2.0 |
| MAC address Table | 4K |
| MAC address Table aging time | 12S / 300S |
| VLAN | Port based and 802.1Q |
| Minimum Frame Size | 64 bytes |
| Maximum Frame Size | 1518/2000/9720 bytes |
| Transmission Bit Rate | 1000 Mbps |
| Connectors | SFP Optical Module |
| 802.1Q MAC packet transparent transmission supported | |

Configuration, Maintenance and Management Interfaces

- Serial Management Port – RS232 interface (COM Port)
- TCP/IP – 10/100BaseT for remote management over a LAN / TCP/IP network
- SNMP V2 (MIB File provided with the equipment)
- Telnet – CLI (Command Line Interface)
- Windows XP and Windows 7 compatible Graphical User Interface (GUI)
- Network Management System (to monitor multiple units from a single central location).

Safety

- Class 1 Laser
- Auto Laser Shut Down (ALS) in the event of fiber break.

Engineering Order Wire (EOW)

- EOW (Engineering Order Wire) - RJ11 Connector

Power Supply

| | |
|-------------------|-------------------------------|
| Power Input | AC, DC, AC + DC |
| DC power | DC - 48V (Input range 18~72V) |
| AC power | AC 100~240V, 50/60Hz |
| Power consumption | < 15 Watts |

Environment

| | |
|-------------|--|
| Temperature | - 5°C ~ +55°C for operation - 40°C to +70°C for storage |
| Humidity | 5% to 95% (35°C) |

Mechanical Specifications

| | |
|-----------|-------------|
| Width | 440 mm. |
| Depth | 210 mm. |
| Height | 44 mm. |
| Weight | 2.7 kg |
| Rack Type | EIA 19 inch |

Ordering Information

| S. No. | Part # | Description |
|--------|----------------|--|
| 1 | 16E1-120-4GigE | VCL-Gigabit Optical Add-Drop Multiplexer 19" Metal box / case 1U High Rack Mount Version Supports : - 16 x E1 Ports [120 Ohms RJ45F] - 4 x Ethernet Ports (1000Mbps, Gigabit) [3 x Electrical RJ45F Port and 1 x Optical Port (Gigabit, SFP based / without SFP)] - Customer Side - 2 x Optical Ports [Gigabit, SFP based / without SFPs] - Network Transmission Side - SNMP, NMS & Telnet for management |
| 2 | 16E1-075-4GigE | VCL-Gigabit Optical Add-Drop Multiplexer 19" Metal box / case 1U High Rack Mount Version Supports : - 16 x E1 Ports [75 Ohm DM37 (M) / BNC (F)] - 4 x Ethernet Ports (1000Mbps, Gigabit) [3 x Electrical RJ45F Port and 1 x Optical Port (Gigabit, SFP based / without SFP)] - Customer Side - 2 x Optical Ports [Gigabit, SFP based / without SFPs] - Network Transmission Side - SNMP, NMS & Telnet for management |

Power Supply Options

| S. No. | Part # | Description |
|--------|--------|--|
| 1 | AC220 | 1 x 100-220V (Range: 100-240) AC Power Supply Input |
| 2 | DC048 | 1 x -48V (Range: 18-72) DC Power Supply Input |
| 3 | ACDC | 1 x 100-220V (Range: 100-240) AC Power Supply Input 1 x -48V (Range: 18-72) DC Power Supply Input |

SFP Options

| S. No. | Part # | Description |
|---------------|---------------|---|
| 1 | VCL-EMOD 0206 | 1.25Gbps SFP Transceiver Duplex LC, 850nm, 550m, MMF, +3.3V, MSA, DDM, Internal Calibration, RoHS |
| 2 | VCL-EMOD 0205 | 1.25Gbps SFP Transceiver Duplex LC, 1310nm, 10Km, SMF, +3.3V, MSA, DDM, Internal Calibration, RoHS |
| 3 | VCL-EMOD 0231 | 1.25Gbps SFP Transceiver Duplex LC, 1310nm, 20Km, SMF, +3.3V, MSA, DDM, Internal Calibration, RoHS |
| 4 | VCL-EMOD 0255 | 1.25Gbps SFP Transceiver Duplex LC, 1310nm, 40Km, SMF, +3.3V, MSA, DDM, External Calibration, RoHS |
| 5 | VCL-EMOD 0155 | 1.25Gbps SFP Transceiver Duplex LC, 1550nm, 40Km, SMF, +3.3V, MSA, DDM, External Calibration, RoHS |
| 6 | VCL-EMOD 0256 | 1.25Gbps SFP Transceiver Duplex LC, 1550nm, 80Km, SMF, +3.3V, MSA, DDM, External Calibration, RoHS |
| 7 | VCL-EMOD 0293 | 1.25Gbps SFP Transceiver Duplex LC, 1550nm, 100Km, SMF, +3.3V, MSA, DDM, External Calibration, RoHS |

Accessories

| S. No. | Part # | Description |
|--------|-------------------|---|
| 1 | VCL-HRNS 1229 | Optical Patch Cord Connectorized Cable [2LC-2LC, 3m, SM] |
| 2 | VCL-HRNS 1238 | Optical Patch Cord Connectorized Cable [2LC-2LC, 10m, SM] |
| 3 | VCL-HRNS 1242 | Optical Patch Cord Connectorized Cable [LC-FC, 10m, SM] |
| 4 | VCL-HRNS 1243 | Optical Patch Cord Connectorized Cable [2LC-2FC, 10m, SM] |
| 5 | VCL-HRNS 1239 | Optical Patch Cord Connectorized Cable [LC-SC, 10m, SM] |
| 6 | VCL-HRNS 1258 | Optical Patch Cord Connectorized Cable [2LC-2SC, 10m, SM] |
| 7 | VCL-ECON 1172 | Connector (Attenuator LC-LC (10 db.)) |
| 8 | VCL-ECON 1173 | Connector (Attenuator LC-LC (20 db.)) |
| 9 | VCL-ECON 1186 | Connector (Attenuator FC-FC (10 db.)) |
| 10 | VCL-ECON 1187 | Connector (Attenuator FC-FC (20 db.)) |
| 11 | VCL-ECON 1197 | Connector (Attenuator SC-SC (10 db.)) |
| 12 | VCL-ECON 1198 | Connector (Attenuator SC-SC (20 db.)) |
| 13 | UMIKit16E1GigEADM | System Core Cables, Installation Accessories, Documentation, System User Manual, System User Manual Disk etc (Set). |

Technical specifications are subject to changes without notice.
Revision 07 - Aug 06, 2012

Headquarters: Phoenix, Arizona**Orion Telecom Networks Inc.**

20100, N 51st Ave, Suite B240,
Glendale AZ 85308
Phone: +1 480-816-8672
Fax: +1 480-816-0115
E-mail: sales@oriontelecom.com
Website: <http://www.oriontelecom.com>

Regional Office: Miami, Florida**Orion Telecom Networks Inc.**

4000 Ponce de Leon Blvd. Suite 470,
Coral Gables, FL 33146 U.S.A.
Phone: 1-305-777-0419,
Fax: 1-305-777-0201
E-mail: sales@oriontelecom.com
Website: <http://www.oriontelecom.com>