

VCL-2702 Network Isolation Switch

Introduction:

VCL-2702: Network Isolation Switch: What is a Network Isolation Switch and why does an organization require it?

VCL provides a comprehensive “Beyond the Firewall” cyber security solutions that designed to assist organizations to prevent and secure their network against firewall breaches and cyber-attacks in real-time. The VCL-2702: Network Isolation Switch is one such element that forms a part of the cyber security suite of products that are offered by VCL.

Most network administrators rely solely on a “Firewall” to secure their IP networks. Some network administrators go one step further and also deploy an additional “Network Traffic Sniffer” which monitors and flags the transmitted and received data anomalies. However, very few network administrators actually plans for an eventuality after a “Firewall” has been breached and the “Network Traffic Sniffer” has recorded anomalies in the data that is being transmitted and received.


The VCL-2702 “Network Isolation Switch” provides the last-line-of-defence in the event of a network security breach. The VCL-2702 “Network Isolation Switch” can be used in conjunction with a “Firewall”, “Network Traffic Sniffer” and multiple VCL-2143 “Network-MouseTrap(s)™ / Advanced Honeypot” to automatically initiate a series of defensive actions that would have been planned by the network administrator, in the event of a network security breach.

Such actions would include:

- i. Disconnecting the Local Area Network (LAN) from the Wide Area Network (WAN)
- ii. Disconnecting only a specific data storage device (SAN / NAS), or Server from the local network
- iii. Generating “Audio-Visual Alarms”
- iv. Sending “SNMP Traps”
- v. Sending “Network Security Alerts” to a centralized NMS.

The Essential Last-Line-of-Defence for Securing the Data Network:

The VCL “Beyond the Firewall” cyber security suite of products do not negate or invalidate the role of the “Firewall” in any manner. The Firewall still remains the primary element of defence against cyber-attacks. However, cyber-attacks succeed because firewalls get breached, or are compromised from within by Trojans or similar malware. The deployment of the VCL “Beyond the Firewall” cyber-security solutions provide the next line of defence against firewall breaches to provide enhanced network security and resilience against cyber-attacks. The VCL-2702: Network Isolation Switch becomes an indispensable tool to deploy defensive “counter-measures” that are to be automatically initiated in real-time, in accordance with the organization's network security policy, in the event of a catastrophic network security breach.

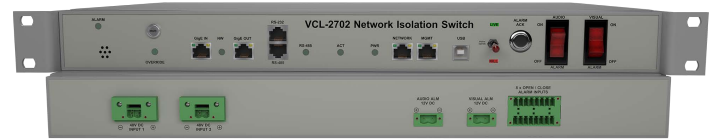

Features & Highlights:

Fail-Safe. Never itself becomes a point of failure.

- i. The equipment maintains data connectivity if the port was put in the operational mode, even in power down condition or upon control card failure.
- ii. The network port shall continue to remain in isolated mode if the port was put in the isolation mode prior to power down or control card failure.

The VCL-2702 is available in two variants.

- a) Single Port Network Isolation Switch,
 - 1U, 19-Inch Rack Mount Version
 - May be used where only one port is required to be isolated from the network
 - Available with 1G Electrical, 1G Optical and 10G Optical Interfaces
- b) Multi-Port Network Isolation Switch,
 - 6U, 19-Inch Rack Mount Version
 - May be used where multiple 1G and 10G ports are required to be isolated from the network
 - Available with 1G Electrical, 1G Optical and 10G Optical Interfaces

VCL-2702 “Network Isolation Switch” provides manual and automatic isolation of the Local Area Network from Wide Area Network, in an event of a network security breach / cyber-attack.

VCL-2702 “Network Isolation Switch” can be used in conjunction with a “Firewall” and a “Network Traffic Sniffer”; as well as with multiple VCL-2143, “Network-MouseTrap(s)™ / Advanced Honeypot” (Network Decoy Servers) to isolate the network in the event of the detection of a network intrusion / breach in the cyber-security perimeter of the network's demilitarized zone.

VCL-2702 “Network Isolation Switch” helps to create and segregate operational zones in an organization, building or a campus network, with a purpose of securing them and individually isolating them from the external network in the event of the detection of a network intrusion or a cyber-attack.

Network Isolation initiation parameters include:

- External triggers (such as the closing of an external, dry-contact alarm relay).
- Script assisted switching by network isolation command through its serial (RS485) interface.
- SNMP trap generated by any one of the honey-pots (decoy servers).
- All events are time-stamped, logged and stored by the VCL-2702, Network Isolation Switch in its non-volatile memory. The logs may be viewed by the network administrator at any time for security audits and analysis.
- Manually Operated Switch.

Technical Specifications**Single-Port Network Isolation Switch:**

Number of Ethernet Ports	2
Interface Orientation	1 x 1G / 10G Gigabit Ethernet Interface towards Network 1 x 1G / 10G Gigabit Ethernet Interface towards Protected Equipment
Guaranteed Maximum Data Throughput	1000 Mbps on 1G Port 10,000 Mbps on the 10G Interface
Interface Types	10/100/1000 BaseT Electrical 1000Base-X Optical 10GBASE-SR 10GBASE-LR 10GBASE-ER 10GBase-LX4 10GBase-WAN
Conformity	IEEE-802.3

Multi-Port Network Isolation Switch:

Number of Ethernet	Up to 36 (In any mix of 1G and 10G Interfaces). (4 Interfaces per card)
Interface Orientation	Up to 36 x 1G/10G Gigabit Ethernet Interface towards Network Up to 36 x 1G/10G Gigabit Ethernet Interface towards Protected Equipment
Guaranteed Maximum Data Throughput	1000 Mbps on 1000 Mbps connection
Interface Types	10/100/1000 BaseT Electrical 1000Base-X Optical 10GBASE-SR 10GBASE-LR 10GBASE-ER 10GBase-LX4 10GBase-WAN
Conformity	IEEE-802.3

Local / Remote Communication Options:

- Telnet / SSH (option to disable clear text communication)
- CLI Control Interface (HyperTerminal or VT100)

Management and Control Ports:

- Serial Management Port – USB
- 10/100 BaseT for remote management
- 10/100 BaseT Control Interface – For switching using SNMP Traps
- Serial Control Interface – RS232 - For switching using scripted commands
- Serial Control Interface – RS485 - For switching using scripted commands

NMS (with Telnet) Specifications:

OAM Network Interface	RJ-45 Ethernet, 10/100BaseT
Compatibility	Ethernet Version 2.0 IEEE802.3
Monitoring and Management	Serial login, Telnet, SSH (With option to disable clear text login for users).

Security and Protection:

- Password Protection with password strength monitor
- SSH

Command Language:

- English text commands
- Graphical User Interface (GUI) – English

External Trigger Inputs:

- **Single Port Version:** 8 x External Alarm Trigger Inputs (Contact Open / Contact Close)
- **Multi Port Version:** 2 x External Alarm Trigger Inputs (Contact Open / Contact Close)

External Alarm Outputs:

- **Single Port Version:** 1 x 12V DC Visual Alarm and 1 x 12V DC Audio Alarm
- **Multi Port Version:** 1 x Dry Contact External Alarm Relay Output

Power Consumption:

- **Single Port Version:** < 18W, Maximum at ambient (steady state 24°C)
- **Multi-Port Version:** < 32W, Maximum at ambient (steady state 24°C)

AC Power Supply Specifications:

Range of input AC	90V~240V AC, 50Hz / 60Hz. Voltage
-------------------	-----------------------------------

48VDC Power Supply Specifications:

Input DC voltage - Dual Input	48V DC (nominal)
Range of input voltage	18V to 60V DC
Input voltage reversal Protection	Provided in the system
Short circuit protection	Provided in the system

110VDC~220VDC Power Supply Specifications:

Input DC voltage - Dual Input	110V DC or 220V DC (nominal)
Range of input voltage	85V DC to 290V DC
Input voltage reversal Protection	Provided in the system
Short circuit protection	Provided in the system

Power Supply Options:

- AC Power (90 to 240V AC, 50/60 Hz)
- DC Power 24V DC; 48V DC; 110V DC; 220V DC

Environmental (Equipment):

Operational	-10C to +55C (Typical: +25C)
Cold start	0C
Storage	-20C to +70C
Humidity	95% non-condensing
Cooling	Convention Cooled. No cooling fans are required

Mechanical Specifications:

	Single Port Version	Multi-Port Version
Height	44 mm (1U)	266 mm (6U)
Width	483 mm (DIN 19-inch)	483 mm (DIN 19-inch)
Depth	305 mm	264 mm
Weight	< 2.5 Kgs.	< 10.0 Kgs.
Rack Mount	19" Rack mounting	19" Rack mounting

Ordering Information:**Single-Port Network Isolation Switch****Core Unit / Common Equipment without PSUs**

Part No.	Product Description
VCL-2702	Single Port Network Isolation Switch - Installation Kit: System Core Cables, Mounting Hardware, Documentation, User Manual *Add Power Supply Option from below
Interface Options	Add - E for 1G (100/1000BaseT) Electrical Interface - O-MM-850 (850nm Multi-Mode) for 1G Optical Interface - O-MM-1310 (1310nm Multi-Mode) for 1G Optical Interface - O-SM-1310 (1310nm Single-Mode) for 1G Optical Interface - O-MM-1550 (1550nm Single-Mode) for 1G Optical Interface

***Add Power Supply Options**

ACDC	1 x 90-240V AC Power Supply Input 1 x 48V DC Power Supply Input
AC220R	2 x 90-240V AC Power Supply Input [Redundant]
DC048R	2 x (-) 48V DC Power Supply Input [Redundant]
DC220R	2 x 110-220V DC Power Supply Input [Redundant]

MTBF and Equipment MTBF:

- Never becomes a point of failure
- Per MIL-HDBK-217F: ≥ 37 years @ 24C
- Per Telcordia SSR 332, Issue 1: ≥ 42 years @ 24C

IEC Standards:

- IEC - EMC – Certified to EN 55032: CISPR 32, EN 55024:2005
- IEC 61000-6-2 (Immunity), IEC 61000-6-4 (Emission)
- Complies to IEEE and IEC standards

Compliance & Regulatory:

- EMC FCC Part 15 Class 2
- Operation ETS 300 019 Class 3.2
- Storage ETS 300 019 Class 1.2
- Transportation ETS 300 019 Class 2.3

CE Compliance:

- RoHS
- Low Voltage Directive 2014/35/EU
- Electromagnetic Compatibility 2014/30/EU

Multi-Port Network Isolation Switch**Core Unit / Common Equipment without PSUs**

Part No.	Product Description
VCL-5082	Multiport Network Isolation Switch - Installation Kit: System Core Cables, Mounting Hardware, Documentation, User Manual *Add Power Supply Option from below
Interface Options	Add - E for 1G (100/1000BaseT) Electrical Interface - O-MM-850 (850nm Multi-Mode) for 1G Optical Interface - O-MM-1310 (1310nm Multi-Mode) for 1G Optical Interface - O-SM-1310 (1310nm Single-Mode) for 1G Optical Interface - O-MM-1550 (1550nm Single-Mode) for 1G Optical Interface

Technical specifications are subject to changes without notice.

© Copyright: Valiant Communications

Revision – 3.0, August 08, 2022

Headquarters: Phoenix, Arizona

Orion Telecom Networks Inc.
20100, N 51st Ave, Suite B240,
Glendale AZ 85308
Phone: 1-305-777-0419
E-mail: sales@oriontelecom.com

Regional Office: Miami, Florida

Orion Telecom Networks Inc.
4000 Ponce de Leon Blvd. Suite 470,
Coral Gables, FL 33146 U.S.A.
Phone: 1-305-777-0419
E-mail: sales@oriontelecom.com